

Temperature Sensors: Thermocouple Wire - Standard Inventory Items

PV INSULATION:
RW--E16PV
RW--E20PV
RW--T16PV
RW--T20PV
RWS-T20PV
RW--J14PV
RW--J16PV
RW--J18PV
RW--J20PV
RWS-J20PV
RW--K14PV
RW--K16PV
RW--K18PV
RW--K20PV
RWS-K20PV

GG INSULATION:
RW--E20GG
RW--E24GG
RW--J20GG
RWS-J20GG
RW--J24GG
RWS-J24GG
RW--K20GG
RWS-K20GG
RW--K24GG
RW--T20GG
RW--T24GG
RW--R/S24GG

KK INSULATION:
RW--J20KK
RW--J24KK

GW INSULATION:
RW--J20GW
RW--J24GW
RW--K20GW
RW--K24GW

NN INSULATION:
RW--J20NN
RW--J24NN
RW--K20NN
RW--K24NN
RW--T20NN
RW--T24NN

HTG INSULATION:
RW--J20HTG
RW--K20HTG
RW--K24HTG

TT INSULATION:
RW--J20TT
RWS-J20TT
RW--J24TT
RWS-J24TT
RW--J30TT
RW--K20TT
RWS-K20TT
RW--K24TT
RWS-K24TT
RW--K30TT
RW--T20TT
RWS-T20TT
RW--T24TT
RW--T30TT

- GG** - Fiberglass Braid
- GW** - Fiberglass Wrap
- HTG** - Ceramic Braid, High Temperature
- NN** - Nylon
- PV** - Polyvinyl Chloride (PVC)
- TT** - Teflon, FEP
- KK** - Kapton

* All of the items listed can have a stainless steel, tinned copper or inconel 600 wire braid added.

Consult factory for availability


- A** - Stainless Steel
- I** - Inconel 600
- C** - Tinned Copper

* Stock inventory is subject to prior sale. Consult factory for delivery.

Conductor Types:

- RWS** - Stranded Wire
- RW** - Solid Wire

HOW TO ORDER:

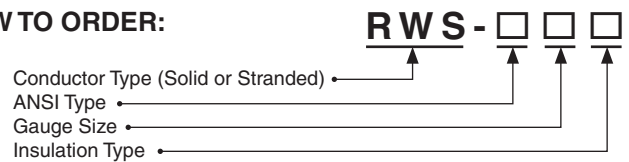

EXAMPLE: To order a 24 gauge - stranded wire - ANSI type "J" with fiberglass braid overeach and overall, the part number is:

